



FULL LINE CATALOG

Floor Preparation Products for Single Family,
Multi-Family or Commercial Applications

PLATFORMTM
PERFORMANCE
FLOORING SYSTEMS

A KEENE INC. COMPANY

For more than seven decades, Dependable has proudly served America's floor preparation industry with innovative, trusted underlayment solutions designed to fix any floor, anywhere.

In 2026, we're building on that legacy. After joining forces with Compotite—a market leader in shower installation systems—we now offer a complete product portfolio ready to meet every challenge your flooring project presents. To better reflect our evolution and our commitment to performance across every surface, we are rebranding as **Platform Performance Flooring Systems™**, adopting our leading Platform product line as the foundation of our new identity.

We are the Platform your flooring system rests on—a strong, reliable base built to support every floor covering in the industry. Together with Compotite, we remain dedicated to providing dependable, high-performance solutions for the next 70 years and beyond.

To our long-standing customers: thank you for your continued trust. To those just discovering us: welcome to Platform—we look forward to helping you build on a stronger foundation.

Explore what Platform has to offer in 2026.

— Alex Keene, General Manager



A KEENE INC. COMPANY



AIA
Continuing
Education
Provider



QUALITY CONSTRUCTION STARTS AT HOME
American Made. Contractor Approved.

TIME TO LEVEL UP

Make it Flat. Pour it Smooth. Build it Sound.





CONNECT



@PlatformPerformanceFS



@PlatformPerformanceFS



@PlatformPerformanceFS



@PlatformPerformanceFS

WE HAVE IT COVERED

PATCH & REPAIR

PAGE 5

PRIMERS & VAPOR MITIGATION

PAGE 9

ODOR CONTROL & DENSIFYING CONSOLIDATORS

PAGE 11

GYPSUM-BASED SLU'S

PAGE 15

SYNTHECEM™ TECHNOLOGY SLU'S

PAGE 17

SELF-DRYING SLU'S

PAGE 21

ROLLED UNDERLAYMENT & SOUND CONTROL

PAGE 23

Start with the Ultimate Foundation

At Platform Performance Flooring Systems, we understand that a flawless finish always begins with a perfectly poured subfloor. That's why our top-tier self-leveling underlayments are crafted to meet the highest standards of professional installers.

Underlayment	Compressive Strength
Platform LCB	4200 PSI (28 Days)
Platform NP	5000 PSI (28 Days)
Platform L2	4100 PSI (28 Days)
Platform L3	5000 PSI (28 Days)
Platform FT	6500 PSI (28 Days)
Platform ELW	> 3500PSI (28 Days)
Platform RC	5500 PSI (28 Days)
Platform GP	4000 PSI (28 Days)
White Skimcoat	4000 PSI (28 Days)
Platform XL	> 3750 PSI (28 Days)
Platform FP	> 3500 PSI (28 Days)

Whether you're working with classic calcium aluminate or cutting-edge hybrid gypsum, our solutions will tackle any challenge. Find the right products to elevate your flooring game with the chart below. Ensuring a smooth, enduring foundation for every job.

	Single-Family	Multi-Family	Light Commercial	Commercial / Retail	Hospitality	Institutional / Medical	Industrial / Manufacturing	Existing Gypsum	Plywood / OSB / Wood Plank	Concrete / Concrete Slab	Concrete Repair / Leveling	Adhesive Residue	Radiant Heat
BUILDING TYPE	X	X	X	X	X	X		X	X		X	X	X
	X	X	X		X	X		X	X			X	X
			X	X	X					X	X	X	
			X	X	X	X				X	X	X	
			X	X	X	X	X		X	X	X		
			X	X	X	X			X	X	X		
	X	X	X	X	X	X	X			X	X		
	X	X	X	X	X	X		X	X	X	X		
	X	X	X					X	X			X	
	X	X	X	X	X	X		X	X	X	X		
SUBSTRATE	X	X	X	X	X	X			X	X	X	X	
	X	X	X	X	X	X		X	X	X	X		

■ Selections represent optimal product placement. Contact Technical Services for assistance with your unique project.

The Product Between the Problem and Perfection.



Platform's trowelable patching products are ideal for coverage on a variety of surfaces or subfloors. Varying from blended cement to mildewcide protected gypsum based products, they are adhesive friendly and easy to use.

Platform GP™

Polymer Modified Gypsum Patch and Skim Coat

Platform GP is a premium gypsum based skimcoat designed for use over gypsum concrete, wood, and other surfaces. Platform GP's polymer modified formula allows for a creamier feel under the trowel, enhanced bond, and superior dry time.



- Creamy, smooth application
- Fast Drying
- Polymer modified for superior bond and durability
- No additives required

Platform XL™

Rapid Drying, Cementitious Floor Patch and Skim Coat

Platform XL is a fast drying, polymer modified, cementitious patch for smoothing dry interior substrates prior to installation of flooring finishes. Fast drying with extended potlife extends your working time, not delaying your finish. Platform XL is easy to work with on virtually any interior surface.



- Rapid, Self-drying patch
- Superior workability
- Feather edge to 1"
- Creamy, grit free application
- High compressive strength Creamy, grit-free application
- No dusting or cracking
- White Latex Liquid diluted can be used per TDS for enhancement

SKU	SIZE	PALLET
DPS25	25 lb bag	90 bags
DPS4X10	4 x 10 lb bags	45 cases

Compressive Strength	3500 PSI (28 Days)
Time to Flooring	1/4" depth - 4 hrs

SKU	SIZE	PALLET
DSCXL25	25 lb bag	90 bags
DSCXL50	50 lb pail	36 pails

Compressive Strength	>3750 (28 Days)
Time to Flooring	1/4" depth - 75 min

Platform's **patch and repair** product line is designed to meet the needs of flooring professionals seeking reliable and high-performance solutions. Our products offer superior ease of use with smooth application, rapid drying times, and excellent bonding to a variety of substrates.

With a focus on quality, durability, and innovation, our solutions are perfect for achieving professional results efficiently, ensuring your repairs and installations are top-notch.



White Skimcoat™

Gypsum Patch and Skimcoat

White Skimcoat is the patch professionals choice for economical, fast setting, high strength gypsum based patch. When White Skimcoat is used with Platform's White Latex Liquid admixture, it provides increased adhesion and flexural strengths for use over problematic substrates.



- Dimensionally stable with superior bond to a variety of substrates
- Rapid Drying
- Horizontal and vertical applications
- Mildewcide Protected
- Compatible with White Latex Liquid

SKU	SIZE	PALLET
DWS25	25 lb bag	90 bags
DWS50	50 lb pail	36 pails

Compressive Strength	4000 PSI (28 Days)
Time to Flooring	1/8" depth - 30 min

White Latex Liquid®

Latex Additive to Improve Patch Bond and Strength

White Latex Liquid is a dilutable, non re-emulsifiable latex additive that can be used with White Skimcoat or Platform XL to increase patch performance and durability. The addition of White Latex Liquid will increase the adhesion and flexibility of White Skimcoat and Platform XL.



- Additive for White Skimcoat and Platform XL
- Improves patch bond, flexural and surface strength
- Enhanced water resistance and patch durability
- Mildewcide Protection

SKU	SIZE	PALLET
DWL5	5 gal pail	36 pails
DWL4X1	4 x 1 gal	36 cases

Platform FP™

Trowelable Flooring Underlayment & Patch

Platform FP is a latex modified, fine textured, trowel applied, rapid drying cementitious underlayment for interior use. Platform FP provides a smooth, durable surface for the installation of a variety of floor finishes such as vinyl, carpet, engineered wood or tile. Platform FP dries rapidly, permitting the installation of floor coverings in as little as 30 minutes.



- Self-Drying, Install Flooring as quickly as 30 minutes
- Easy Mixing and placement with no additives required
- Superior Bond to absorbent and non-absorbent materials
- RH Tolerant

SKU	SIZE	PALLET
DPPF4X10	4X10 lb bag	45 cases

Compressive Strength	> 3500 PSI (28 Days)
Time to Flooring	1/4" depth - 30-60 min

Platform RC™

High Strength Geo-Polymer Screed Mortar

Platform RC (Rapid Concrete) is a high-performance screed mortar engineered for fast track interior and exterior applications that require rapid drying, exceptional bond and durability. Platform RC may be conveniently mixed in mortar mixers, extended 50% with aggregate and holds slopes well for ramping applications including resloping of exterior concrete such balconies.



- Suitable for Interior and Exterior applications
- Superior screed for trench fills, balcony reslopes, deep ramps & more
- Suitable for applications 3/8" - 6" in a single lift*
- Use for concrete repairs prior to application of Platform EMS, Epoxy Moisture Mitigation


SKU	SIZE	PALLET
PPRC50	50 lb bag	48 bags

Compressive Strength	5500 PSI (28 Days)
Time to Flooring	1/4" depth - 90 min

To Protect and Preserve

A Complete Moisture Mitigation System

Elevate your flooring with Platform's top-tier moisture mitigation. Exceeding ASTM standards, these solutions resist high pH, handle 100% RH and 25 lbs MVER, and are free from harmful chemicals. Enjoy peace of mind with our comprehensive warranty extending to your finished floors.

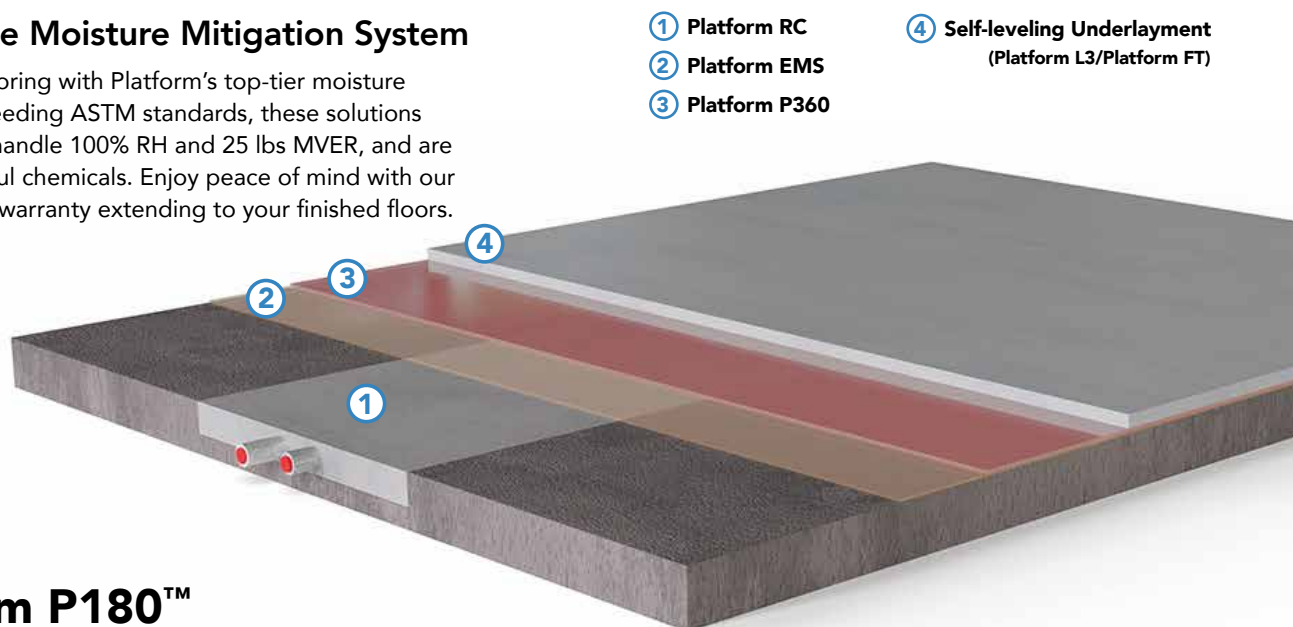

- ① Platform RC
- ② Platform EMS
- ③ Platform P360

- ④ Self-leveling Underlayment
(Platform L3/Platform FT)

Platform P180™

Professional Interior Primer for Patch and Underlayment

A multi-purpose primer for the Multi-Family environment! Platform P180 provides superior bond and enhances product performance of Platform's underlayments and patches when applied to Gypsum, wood, concrete, Adhesive residue, LVP/VCT, epoxy and more. Offers maximum versatility, Ultra low-VOCs, low odor, fast drying, tremendous coverage and easy handling.



- Fast drying over absorbent and non absorbent surfaces
- Strengthens weak Gypsum surfaces
- Isolates approved adhesives
- Low odor and Ultra low-VOC

SKU	SIZE	PALLET	Coverage	Up to 250 - 400 ft²
DMFP5G	5 gal pail	36 pails	Dry Time	45 - 90 minutes
DMFP4X1	4 x 1 gal	36 cases		



Platform EMS™

Advanced Epoxy Resin Moisture Mitigation Solution

At Platform, we understand the cost and interruption moisture can cause to flooring and the commercial environment. We offer only the most reliable means to treat moisture issues with a system that is suitable for use on concrete with up to 100% RH (Per ASTM F2170) or a Moisture Vapor Emissions rate of 25 lbs (per ASTM F1869). Our commitment to performance and installer well-being led Platform to develop Platform EMS free of Benzyl Alcohol (vulnerable to failure) and Nonylphenols (Health hazard). Our warranty represents the best in the industry with replacement through to the finished flooring surface. When risk of moisture intrusion and damage is not an option - turn to Platform EMS to keep your flooring and environment dry and healthy!

- Meets Requirements of ASTM F3010
- Treats Concrete up to 100% RH (ASTM F2170) and 25 lbs MVER (ASTM F1869)
- Contains No Benzyl Alcohol (contributes to osmotic blisters)
- Contains No Nonylphenols (associated with health risks)
- Coverage per kit -300-400sq ft
- Warranty available through to the finished floor*

Platform P360™

Universal, Alkali Resistant Primer for Underlayments

Platform P360 is a breakthrough acrylic copolymer primer technology with alkali resistance to pH 14 while providing superior bond to substrates when used with Dependable Self-leveling underlayments. Suitable for a wide variety of porous and non-porous substrates making it the only required primer in typical SLU installations. Offers maximum versatility, ZERO VOCs, fast drying, tremendous coverage and easy handling.



- Fast Drying
- Maximum versatility over absorbent and non-absorbent substrates
- Superior Bond Performance
- Low odor and low-VOC
- Prolonged resistance to high pH14

SKU	SIZE	PALLET	Coverage	Up to 450 - 650 ft²
PP3605G	5 gal pail	36 pails	Dry Time	45 - 90 minutes
PP3604X1	4 x 1 gal	36 cases		

SKU	SIZE	PALLET	Coverage per kit	400 ft²
PEMS-3.16	3.16 gal kit	32 kits	Dry Time	5-6 hours



Restore, Seal, and Strengthen Problem Substrates with Confidence

Platform's **Odor Control & Densifying Consolidators** rehabilitate compromised substrates, lock in contaminants, and create stable surfaces ready for flooring installation. From deep-penetrating primers that strengthen weak gypsum or lightweight concrete to sealers that block moisture and trap odors, these solutions solve common jobsite challenges—reducing callbacks, protecting finished floors, and improving long-term performance.

Platform ODX™

Penetrating sealer for sealing substrate odor

A water-based emulsion that penetrates into absorbent substrates and forms a strong odor and water-resistant film. Enzymatic treatments consume what they can at the odors source, however fresh spills often reactivate remaining substrate contamination and release additional odor. Platform ODX™ penetrates into absorbent substrates and forms a highly water-resistant film locking moisture out, and odors in.



- Seals Old Odors in, Keeps new ones out!
- Easy application by broom
- Quick Drying (typically under 60 minutes)
- Low odor and Ultra Low VOC

SKU	SIZE	PALLET
DMFOS5G	5 gal pail	36 pails
DMFOS4X1	4 x 1 gal	36 cases

Coverage	Up to 350 - 500 ft ²
Dry Time	60 - 90 minutes

Platform SLV™

Penetrating and Consolidating Low Viscosity Epoxy Primer

Platform SLV is a very low viscosity water-based surface strengthening epoxy primer. A single coat application, Platform SLV penetrates compromised gypsum or lightweight concrete and provides a strengthened surface prior to application of leveling, patching, waterproofing, or installation of flooring goods. Platform SLV may also be utilized to treat stable surfaces that suffer from hairline cracking. Once cured, Platform SLV is typically compatible with primers & adhesives for non absorbent surfaces.

- Superior penetration of weak, dusty surfaces
- One Application System
- Fast, Cost efficient repairs
- Low odor and Low VOC

SKU	SIZE	PALLET	Coverage*	100-350 ft ²
PSSLV63	.63 gal cans	50 cans	Dry Time	6-12 hours

*DEPENDENT ON RATIO OF MIX

Platform CSX™

Fast-Curing Epoxy for Substrate Repair

Platform CSX is a two-part epoxy designed to repair damaged substrates. Offering high strength and rapid curing, Platform CSX can amalgamate broken substrates together, consolidating the broken substrate into a stable surface for finished floor coverings. Platform CSX may also be used as an epoxy primer for self-leveling overlay applications.



- Typically a one coat application
- Fast cure
- Same day cover
- VOC free
- Compatible with most floor covering and toppings

SKU	SIZE	PALLET
DGSLCONS-10	10 gal kit	36 kits

Coverage	100 sq. ft. / gal. @ 100 mils
Dry Time	4-6 hours



THE REPAIR FAMILY FOR THE MULTI-FAMILY

ENGINEERED FOR PLACEMENT OVER GYPSUM AND WOOD SUBSTRATES

Platform's materials offer everything from rapid repair of existing gypsum substrate, to partial or full substrate replacement while retaining sound and fire ratings (UL). Owned and backed by one of the largest Multi-Family solutions providers in the industry, Platform offers American engineered and manufactured solutions for new construction and renovation.



Platform SLV™

Provides a sound, strong, consolidated surface prior to flooring repair. Typically compatible with primers and adhesives for non-absorbent surfaces once cured.



Platform LCB™

A Pumpable, Fiber-Reinforced, Polymer-Modified Gypsum Hybrid SLU. Platform LCB is ideal for existing gypsum, wood and compromised substrates.



Platform P180™

Platform P180 provides superior bond and enhances the product performance of our underlayments and patches. Ultra low-VOCs, fast drying, tremendous coverage and easy handling.



Platform ODX™

Penetrates into absorbent substrates and forms a strong odor and water-resistant film. Penetrates into absorbent substrates and forms a film locking moisture out, and odors in.

GYPSUM BASED UNDERLAYMENTS

Platform's comprehensive range of self-leveling **gypsum-based underlayments** are designed to address every aspect of your substrate needs. Whether you're dealing with sound concrete, smooth concrete, weak concrete, adhesive residue, dusty gypsum, wood, vinyl, radiant surfaces, or even unique substrates, rest assured, we have the perfect solution for you.

Seeking easy to use, high-performing products to reach flat and smooth tolerances? **At Platform Performance Flooring Systems, we have you covered every step of the way.**



Platform LCB™

Fiber Reinforced Gypsum Self-Leveling Underlayment

Platform LCB is a fiber reinforced, polymer modified gypsum based self leveling underlayment. Platform LCB is ideal for use over existing gypsum, wood and compromised substrates. Platform LCB may be used over approved wood subfloors without reinforcing lath and quickly provides a sound, dimensionally stable and smooth surface for a wide variety of floor finishes.



- Fiber reinforced for wooden floors and compromised gypsum substrates
- Accelerated drying facilitates rapid flooring installation
- Walkable after 2 hours, light trade traffic next day
- Suitable where UL Fire Ratings are required
- Apply from 1/4" - 2" + in a single lift



SKU	SIZE	PALLET
DSFLCB50	50 lb bag	48 bags

Compressive Strength	4200 PSI (28 Days)
Time to Flooring	1/4" depth - 24 hrs

Platform NP™

Premium Hybrid Gypsum Cement Self-Leveling Underlayment

Platform NP (Nominal Prep) is a hybrid cement self-leveling underlayment for time-sensitive projects, ensuring no shrinkage on compromised substrates. It offers fast-track installation without sacrificing quality, providing excellent flowability, healing properties, and robust performance. Suitable for various surfaces without preparation, it dries quickly to keep both residential and commercial applications on schedule.




- No Pull SLU provides premium, smooth surface for flooring
- Suitable where UL Fire Ratings are required
- Walkable after 2 - 3 hours, light trade traffic next day
- Optimized for installations 1/4" and under, can be poured to 2" +
- Extendable with sand



SKU	SIZE	PALLET
DSFNP50	50 lb bag	48 bags

Compressive Strength	5000 PSI (28 Days)
Time to Flooring	1/4" depth - 16- hrs

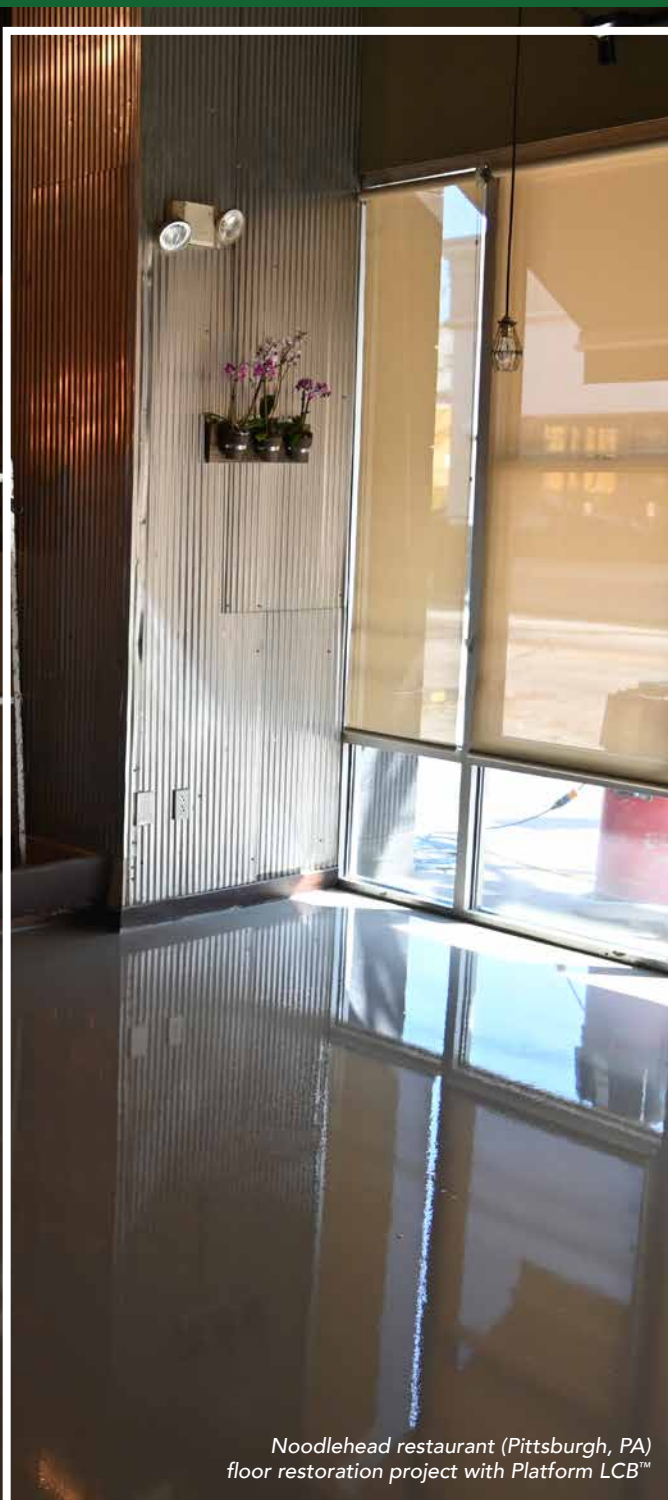

Noodlehead restaurant (Pittsburgh, PA)
floor restoration project with Platform LCB™

SYNTHECEM™ TECHNOLOGY UNDERLAYMENTS/OVERLAYMENTS

Our performance-driven **Synthecem Technology Underlayments / Overlayments** provide professional-grade solutions for creating flat, smooth, and durable subfloors that set flooring installations up for success. Designed to meet a wide range of jobsite demands, these formulations offer the ideal balance of flow, strength, and reliability—from everyday surface leveling to high-performance applications requiring superior durability. The result is consistent surface quality, dependable adhesion, and efficient project timelines, helping contractors install with confidence and deliver long-lasting results.



Platform L3™

High Flow, High Strength Self-Leveling Underlayment/Overlayment

Platform L3 is an advanced, polymer-modified self-leveling underlayment/overlayment featuring Synthecem™ portland cement technology. Engineered for rapid hardening and high strength, it offers a shrinkage-free binder system, ideal for low-prep installations in residential, commercial, and institutional settings. Suitable for various substrates including concrete, gypsum, wood, and well-bonded adhesives.



- Synthecem cement system facilitates low surface preparation
- 5000 psi, dense surface provides superior resistance to wheel tracking and high point loads
- Suitable to leave exposed with approved coatings applications
- Optimized for installations 1/4", capable to 2" +



SKU	SIZE	PALLET
PL350	50 lb bag	48 bags

Compressive Strength	5000 PSI (28 Days)
Time to Flooring	1/4" depth - 24 hrs

Platform L2™

Self-Leveling Underlayment

Platform L2 utilizes Synthecem™ portland cement technology for a versatile self-leveling underlayment, accommodating variable water ratios for leveling and ramping. It's ideal for uneven or damaged floors in residential, commercial, and institutional settings, drying to a smooth, hard surface in 16 hours. Excellent volume stability and bonding, it applies easily over various substrates without mechanical preparation, including concrete, gypsum, wood, and corrugated steel deck, as well as well-bonded adhesives.



- Synthecem cement system facilitates low surface preparation
- Optimized for application 1/4" - 2" +
- Walkable after 2-3 hours, extendable with sand
- Typically ready for flooring after 24 hours*



SKU	SIZE	PALLET
PL250	50 lb bag	48 bags

Compressive Strength	4100 PSI (28 Days)
Time to Flooring	1/4" depth - 24 hrs

Synthecem™ Technology: The solution to today's difficult flooring challenges.



More than Calcium Aluminate Cements, and far more than Engineered Cements, **Synthecem™** is purpose-driven, hydraulic cement underlayment technology that optimizes successful installations.

Working from a baseline of European Technology, Synthecem sets a new performance standard by combining a proprietary blend of carefully controlled cements and chemical admixtures.

Integration of Synthecem DNA means products offer outstanding dimensional stability, bond, self-leveling and smoothing characteristics.

Clean, Prime and Pour with Synthecem powered products to generate flat, smooth and hard surfaces that are suitable for all finished flooring.

OWNERS / SPECIFIERS

Materials utilizing Synthecem technology facilitate flat, durable floors that provide for efficient flooring installation and increase the value of a whitespace.

DISTRIBUTORS

Simplify the contractors life. Synthecem derived materials mean less work, more forgiveness and better outcomes for contractors.

CONTRACTORS

Materials utilizing Synthecem technology require less surface preparation, ensuring maximum jobsite versatility. Featuring reduced dust when mixing, offering greater working time and forgiving placement.

PROJECT PROFILE

Atlanta's Historic Pratt-Pullman Yard

Platform's products were the first down in this fully floating and reinforced substrate solution for this football venue.

Details: Pratt-Pullman Yards Industrial Site converted for Fan Controlled Football (FCF)

Issue: 1 - 1.5" bellies throughout appx. 30,000 ft² concrete substrate. Unbonded solution required.

Solution: Quiet Curl 025 MC sound mat inverted with 1" of Platform L2



Experience the revival of Atlanta's iconic Pratt-Pullman Yard, now transformed into a cutting-edge "creative city" tailored for the entertainment industry, including the innovative Fan Controlled Football (FCF).

Spanning 27 acres in Kirkwood, this site, steeped in history since its acquisition in 1994 by the Pratt Engineering Company, originally served as a sugar and fertilizer processing plant before becoming a crucial repair center for Pullman Railroad cars in 1926. Owned by Atomic Entertainment, the yard is now a dynamic mixed-use hub featuring entertainment venues, dining options, and residential and commercial spaces, seamlessly blending historical preservation with modern innovation. Partnering with All American Surfaces South, Platform delivered a flawless, non-invasive solution for the site's unique concrete substrate, ensuring a smooth and resilient foundation for its role as a premier venue in the FCF and creative arts communities.

SELF-DRYING UNDERLAYMENTS

Platform's line of **self-drying underlayments** are the ultimate solution for repair professionals for when a product needs to excel in the most challenging of applications. Our high-performance, specialty solutions are crafted for environments that demand flexibility and durability. From rapid repairs and moisture control to grind & seal, epoxy coating, polishing, and balcony restoration, our self-drying solutions are engineered to excel under pressure. Elevate your repair game with our self-drying underlayments—where excellence meets innovation in every challenge.



**Lighten
Your Load.
Strengthen
Your Floors.**

Platform FT™

Fast Track, High Strength Under/Overlayment

Platform FT (Fast Track) is a premium self-drying, calcium aluminate cement based self-leveling underlayment with superior placement characteristics and low surface prep capability. Platform FT is suitable for leveling and smoothing of floors for tile, stone, resilient, wood, carpet and other floor coverings. Platform FT offers a variable water ratio to aid in application and design flexibility.



- Superior leveling with 28 day strengths >5500 - 6500 psi
- Rapid strength development, Optimized for grind and seal applications
- Polishable surface for warehouse or similar environments*
- Walkable in 2 hours, suitable for flooring or coatings 4-16 hrs after pour*
- Apply from feather to 1.5" NEAT in a single lift

SKU	SIZE	PALLET
PPFT50	50 lb bag	48 bags

Compressive Strength	6500 PSI (28 Days)
Time to Flooring	1/4" depth - 16 hrs

Platform ELW™

Everyday Light Weight Self-leveling Underlayment

Platform ELW (Everyday Light Weight) is a premium fast drying, calcium aluminate cementitious self-leveling underlayment that reduces the dead weight load of traditional SLU's by about 35% all while delivering compressive strengths > 3500 psi. Platform ELW is suitable for use in most flooring applications without the costly and time consuming need to cap with a stronger product prior to installing finished flooring.




- Reduced dead weight by about 35% over traditional SLUs
- Install most finished flooring next day without capping*
- Use from 1/4" - 2" in a single lift
- Easier handling & higher sustainability

SKU	SIZE	PALLET
PPELW30	33 lb bag	48 bags

Compressive Strength	> 3500 PSI (28 Days)
Time to Flooring	1/4" depth - 4 hrs

ROLLED UNDERLAYMENTS & SOUND CONTROL

Platform Performance Flooring Systems' rolled underlayments deliver high-performance uncoupling, sound control, and waterproofing in one step—simplifying installation while protecting tile assemblies from movement, moisture intrusion, and impact noise across residential and commercial applications.

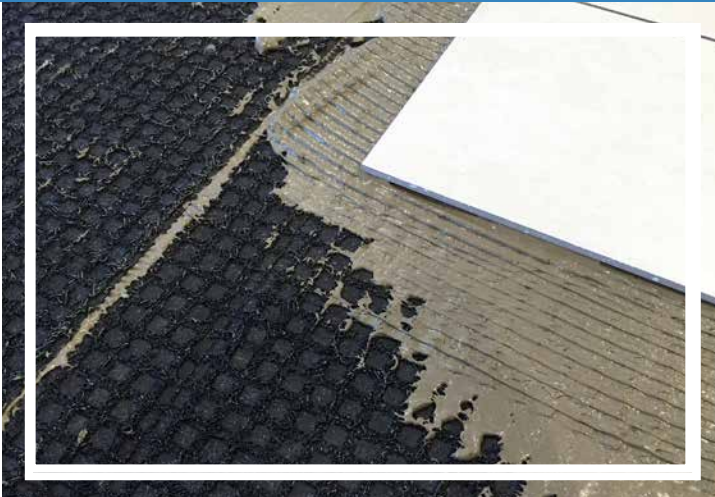

KeedeRoll® MT

High Load Bearing Uncoupling and Sound Control Mat

KeedeRoll® MT is a high load bearing Uncoupling and Sound Proofing Membrane ideal for use under ceramic tile installations. KeedeRoll® MT's geometrical shape with entangled net ensure an effective, well bonded one step application to isolate tile and grout from substrate movement. Bonded to a patented "Muffling" technology (MT) fabric KeedeRoll® MT provides exceptional reduction of sound and impact transmission.

KeedeRoll® MT represents a simple, one step installation that protects the finished tile installation from substrate stresses all while significantly reducing sound and noise transmission in multi-family, residential and commercial environments.

KeedeRoll MT's Structural Reinforcement Technology enhances the strength of your tile floor in two critical ways: KeedeRoll MT uncouples the tile from the subfloor, and helps absorb shear stresses, while keeping the tile in place. It also increases the bearing area of the subfloor by creating a monolithic substrate beneath the tile: effectively connecting two layers of thin-set and the mat, creating one surface area. The mat further reinforces the thin-set, with the fabric connecting the layers of mortar and the entangled net offering structural support directly below the tile.

- 2-in-1 uncoupling and sound deadening solution
- Extra Heavy Rated (ASTM C627)
- 21 Point IIC Delta (8" Concrete)
- Reduce Weight load by 75% vs Recycled rubber
- Simplified installation to concrete with standard floor adhesives.



SKU	COVERAGE	WEIGHT	PALLET
MT200	200 sq. ft.	32 lbs.	12 rolls
MT50	50 sq. ft.	8 lbs.	36 rolls



KeedeRoll® WT

Uncoupling Mat with Built-In Waterproofing and Crack Isolation for Reliable Tile Systems

KeedeRoll WT is a watertight, vapor-permeable uncoupling mat designed for use under ceramic, porcelain, and natural stone tile installations. It offers superior crack isolation, load distribution, and waterproofing protection for both residential and commercial applications.

This waterproof uncoupling mat features a built-in 6-inch seam overlap, eliminating the need for seam tape and simplifying installation. It is compatible with modified mortar for proper adhesion, ensuring maximum performance and longevity.

- Built-in seam overlap for added protection
- Superior crack isolation and point-load deflection
- Works with both modified and unmodified mortars
- Lay-Flat Technology
- Easy to cut and install
- Designed for residential and commercial applications

SKU	COVERAGE	WEIGHT	PALLET
WT200	200 sq. ft.	32 lbs.	12 rolls

The First National Center in Oklahoma City, a Art Deco masterpiece from 1931, has been magnificently restored to merge its historic charm with contemporary functionality. This mixed-use development now seamlessly integrates residential apartments, dining venues, retail spaces, and a signature hotel.

Central to this transformation was the use of advanced materials: **Primer P360**, **Platform L3**, and **KeedeRoll® MT**. Primer P360's rapid-drying formula ensured a strong bond across diverse surfaces, while Platform L3's high-strength, self-leveling underlayment significantly streamlined surface preparation. KeedeRoll® MT added an extra layer of quiet comfort for both residents and hotel guests. This strategic combination not only provided a flawless foundation for the building's renovation but also preserved its architectural heritage, enhancing its functionality for modern use.



BEFORE



AFTER

PROJECT PROFILE

Silent Sophistication & Historic Elegance

at Oklahoma City's Iconic Art Deco First National Center


Roll Out Quiet Confidence

Improve Your Tile Installations with Soundproofing

KeedeRoll MT is a high load bearing Uncoupling and Sound Proofing Membrane ideal for use under ceramic tile installations. KeedeRoll MT's geometrical shape with entangled net ensure an effective, well bonded one step application to isolate tile and grout from substrate movement. Bonded to a patented "Muffling" technology (MT) fabric KeedeRoll MT provides exceptional reduction of sound and impact transmission.

KeedeRoll MT represents a simple, one step installation that protects the finished tile installation from substrate stresses all while significantly reducing sound and noise transmission in multi-family, residential and commercial environments.

- ① Platform RC
- ② Approved Flooring Adhesive
- ③ KeedeRoll MT
- ④ Keene Thinset
- ⑤ Ceramic Tile

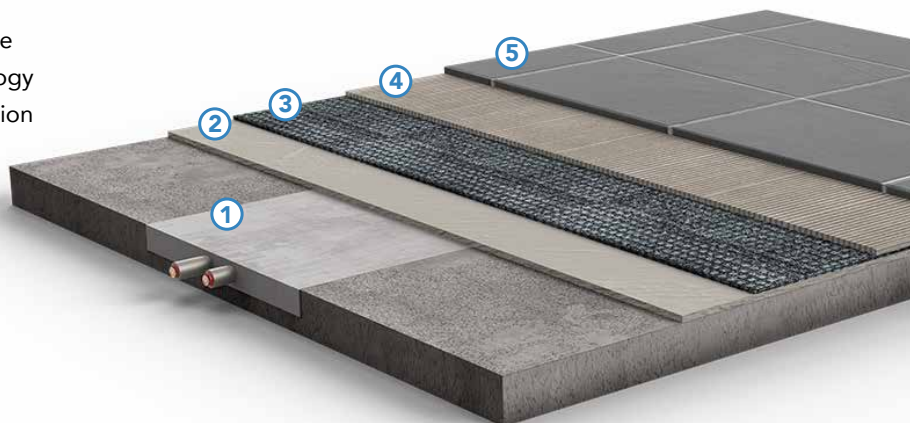

A Keene Inc. Company



A KEENE INC. COMPANY



QUALITY CONSTRUCTION STARTS AT HOME
American Made. Contractor Approved.



AIA
Continuing
Education
Provider

Want to learn more about Platform Performance
Flooring Systems? Call and talk to a flooring expert.

877-514-5336

PlatformPerformance.com

Make it Flat. Pour it Smooth. Build it Sound.

DEP-035987-0226

PRODUCT INFORMATION:

See our website PlatformPerformance.com for the most up-to-date product information.

NOTE:

Published technical data & instructions are subject to change without notice. Please contact Dependable for the most current technical data, safety data & application instructions. Keene Inc. and/or its affiliates assume no responsibility for any errors that may inadvertently appear in this document.

LET MAKE SAFETY FIRST!

Follow approved safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read applicable PDS and product literature before specification and installation.

© 2026 Keene Inc. and/or its affiliates. All rights reserved.

Printed in the USA

2926 Chester Avenue, Cleveland, OH 44114