




Waterproof  
Uncoupling Membrane

**KeedeRoll<sup>®</sup>**  
**WT**

**KeedeRoll<sup>®</sup> WT** is a watertight uncoupling mat that delivers dual defense protection with a waterproof barrier and Structured Strand<sup>™</sup> layer for crack isolation and load distribution. Its built-in seam overlap, easy rollout design, and broad mortar compatibility make installation fast and reliable for any space.

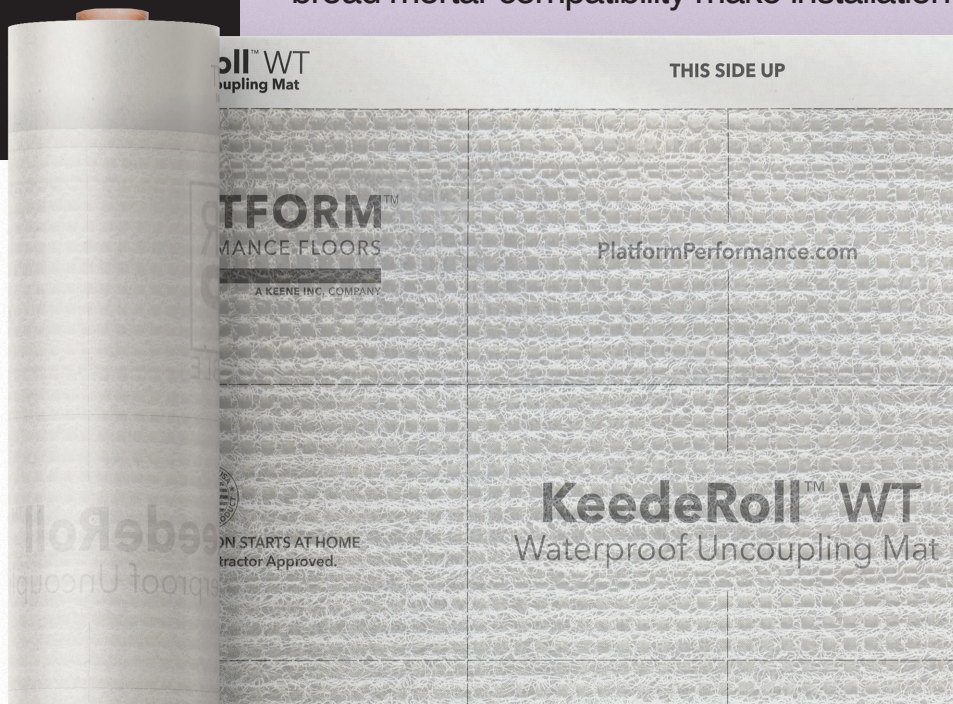

#### FEATURES

- › Built-in seam overlap for added protection
- › Superior crack isolation and point-load deflection
- › Works with both modified and unmodified mortars
- › Lay-Flat Technology
- › Easy to cut and install
- › Designed for residential and commercial applications
- › 10 Year Warranty

# High Load-Bearing Watertight Uncoupling Mat

**KeedeRoll® WT** is a watertight uncoupling mat engineered for ceramic, porcelain, and natural stone tile installations. Its dual defense protects your investment with a waterproof barrier that stops moisture intrusion and a Structured Strand™ performance layer that provides superior crack isolation and load distribution—outperforming leading brands in reducing subfloor deflection. **KeedeRoll® WT** features a built-in seam overlap, eliminating the need for seam tape and simplifying installation.



| Technical Properties |      |               |           |           |             |
|----------------------|------|---------------|-----------|-----------|-------------|
| Property             | Unit | Average Value | Min Value | Max Value | Test Method |
| Basic Weight         | gsm  | 137.4         | 133.8     | 143.1     | ASTM D5261  |
| Thickness            | mm   | 0.46          | 0.41      | 0.50      | ASTM D777   |
| Width                | inch | 48.0          | —         | —         | —           |
| MD Tensile Strength  | lbf  | 105.3         | 102.2     | 108.2     | ASTM D5035  |
| CD Tensile Strength  | lbf  | 77.9          | 75.0      | 82.9      | ASTM D5035  |
| MD Elongation        | %    | 170.2         | 151.7     | 197.8     | ASTM D5035  |
| CD Elongation        | %    | 174.2         | 142.7     | 210.7     | ASTM D5035  |
| MD Tear Strength     | lbf  | 34.1          | 31.3      | 36.5      | ASTM D4533  |
| CD Tear Strength     | lbf  | 21.8          | 19.2      | 25.3      | ASTM D4533  |

|                      |                                      |
|----------------------|--------------------------------------|
| Square Feet Per Roll | 190 sq. ft                           |
| Size                 | 4 ft. (47.5") width by 50 ft. length |
| Weight               |                                      |
| SKU                  |                                      |